


1915-E

19" Resizing LCD, 1000 nits LED backlight, 1680x342



Key Features

- 19" resizing LCD
- Resizing display (aspect ratio of 16:3)
- Sunlight readable, high brightness (1,000 nits)
- Resolutions: 1680 x 342
- Wide viewing angle of 178° (H), 178° (V)
- Low power consumption
- BL MTBF: 70,000 hours

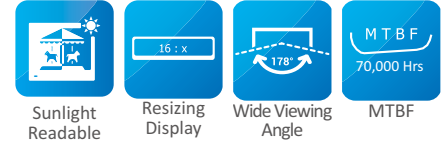

Specifications

	SSH1915-E	SSD1915-E
Description	19" Resizing LCD, 1000 nits LED backlight, 1680x342	
Screen size	19"	
Display area (mm)	473.7(H) x 96.4(V)	
Brightness	1000 cd/m ²	
Resolution	1680x342	
Aspect ratio	16:3	
Contrast ratio	2000:1	
Pixel pitch (mm)	0.282 (H) x 0.282 (V)	
Pixel per inch (PPI)	90	
Viewing angle	178° (H), 178° (V)	
Color saturation (NTSC)	76%	
Display colors	16.7M	
Response time (Typical)	20ms	
Video interface	VGA, DVI-D	
Input power	DC 12V	
Power consumption	25w	
Dimensions (mm)	493.7x123.1x16.7	496.6x126x57.3
Bezel size (U/B/L/R)	10.2/10.2/8/8	11.65/11.65/9.45/9.45
Weight (Net)	1kg	2.3kg
Mounting		VESA 75x75, 100x100
OSD key	4 keys (Power switch, menu, +, -)	
OSD control	Brightness, color, contrast, H/V position... etc	
Operating temperature	0°C ~ +50°C	
Storage temperature	-20°C ~ +60°C	
Product approval		CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSH1915-ENN-G01	19",1000nits,1680*342,LID19.AD2662GD,LS,DC 12V input,V2
SSD1915-ENB-G01	19",1000nits,1680*342,LID19.AD2662GDMR.O/B,DC12V input,V01