


# 1968-E



19" TFT LCD, 1600 nits LED backlight, 1280x1024

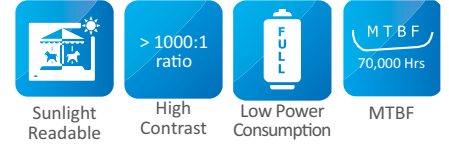

## Key Features

- 19" sunlight readable, high brightness (1,600 nits)
- Resolutions: 1280 x 1024
- Industry leading LED backlight
- Aspect ratio of 5:4
- High contrast ratio (1000:1)
- Low power consumption
- BL MTBF: 70,000 hours

## Specifications

	DLF1968-E	DLH1968-E	SLO1968-E	SLD1968-E
Description	19" TFT LCD, 1600 nits LED backlight, 1280x1024			
Screen size	19"			
Display area (mm)	376.3(H) x 301.1(V)			
Brightness	1600 cd/m <sup>2</sup>			
Resolution	1280x1024			
Aspect ratio	5:4			
Contrast ratio	1000:1			
Pixel pitch (mm)	0.294 (H) x 0.294 (V)			
Pixel per inch (PPI)	86			
Viewing angle	170° (H), 160° (V)			
Color saturation (NTSC)	80%			
Display colors	16.7M			
Response time (Typical)	5ms			
Video interface	LVDS	VGA, DVI-D		
Input power		DC 12V		
Power consumption	28w	31w		
Dimensions (mm)	396x324x14.5	396x324x14.5	429.2x327x36.5	396x326x36.5
Bezel size (U/B/L/R)	9.5/9.5/7.9/7.9	9.5/9.5/7.9/7.9	11/11/24.5/24.5	10.5/10.5/7.9/7.9
Weight (Net)	2.4kg	2.45kg	2.75kg	2.7kg
Mounting			VESA 75x75,100x100	VESA 75x75,100x100
OSD key		4 keys (Power switch, menu, +, -)		
OSD control		Brightness, color, contrast, H/V position... etc		
Operating temperature	0°C ~ +50°C			
Storage temperature	-20°C ~ +60°C			
Product approval			CE, FCC	CE, FCC

## Ordering Information

DLF1968-ENN-A12	19",1600nits,SXGA,LID19B06.w/o Boss,V02(5 in 1)
DLH1968-ENN-I11	19",1600nits,SXGA,LID19A.AD6038GD,w/o Boss,5 in 1.V02
SLO1968-ENB-G12	19",1600nits,SXGA,LID19A09.AD2662GDVAR,DC12V,O/B.V02(2 in 1)
SLD1968-ENB-G12	19",1600nits,SXGA,LID19A.AD2662GDVAR,O/B,DC12V.V02(2 in 1)