


1975-E

19" TFT LCD, 1000 nits LED backlight, 1280x1024

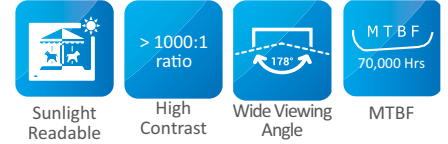

Key Features

- 19" sunlight readable, high brightness (1,000 nits)
- Resolutions: 1280 x 1024
- Aspect ratio of 5:4
- Wide viewing angle of 178° (H), 178° (V)
- High contrast ratio (2000:1)
- Low power consumption
- BL MTBF: 70,000 hours

Specifications

	DLF1975-E	DLH1975-E	SLO1975-E	SLD1975-E
Description	19" TFT LCD, 1000 nits LED backlight, 1280x1024			
Screen size	19"			
Display area (mm)	376.3(H) x 301.1(V)			
Brightness	1000 cd/m ²			
Resolution	1280x1024			
Aspect ratio	5:4			
Contrast ratio	2000:1			
Pixel pitch (mm)	0.294 (H) x 0.294 (V)			
Pixel per inch (PPI)	86			
Viewing angle	178° (H), 178° (V)			
Color saturation (NTSC)	77%			
Display colors	16.7M			
Response time (Typical)	28ms			
Video interface	LVDS	VGA, DVI-D		
Input power		DC 12V		
Power consumption	32w	38w		
Dimensions (mm)	396x324x14.5	396x324x14.5	429.2x327x36.5	396x324.8x36
Bezel size (U/B/L/R)	9.5/9.5/8/8	9.5/9.5/8/8	11/11/24.5/24.5	9.9/9.9/7.9/7.9
Weight (Net)	2.5kg	2.6kg	2.8kg	2.7kg
Mounting			VESA 75x75,100x100	VESA 75x75,100x100
OSD key		4 keys (Power switch, menu, +, -)		
OSD control		Brightness, color, contrast, H/V position... etc		
Operating temperature	0°C ~ +50°C			
Storage temperature	-20°C ~ +60°C			
Product approval			CE, FCC	CE, FCC

Ordering Information

DLF1975-ENN-A12	19",1000nits,SXGA,LID19B.w/o boss,5 in 1,V02
DLH1975-ENN-G12	19",1000nits.SXGA,LID19B.AD2662GD,w/o boss,5 in 1.V02
SLO1975-ENB-G02	19",1000nits,SXGA,LID19.AD2662GD,O/B,V01
SLD1975-ENB-G02	19",1000nits,SXGA,LID19.AD2662GD+IO Board,O/B,V01