


2126-A/ 2126-E



21.5" TFT LCD, 1200/1600 nits LED backlight, MaxRGB(NTSC 94%/ 85%), 1920x1080

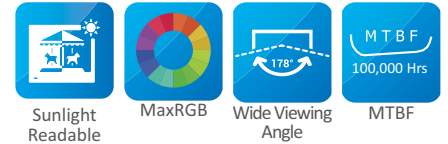

Key Features

- 21.5" sunlight readable, high brightness (1,200/ 1,600 nits)
- Resolutions: 1920 x 1080
- MaxRGB (NTSC 94%/ NTSC 85%)
- Wide viewing angle of 178° (H), 178° (V)
- High color contrast ratio (4500:1/ 3700:1)
- Low power consumption
- BL MTBF: 100,000 hours/ 70,000 hours

Specifications

	DLF2126-A/ 2126-E	DLH2126-A/ 2126-E	DLO2126-A/ SLO2126-E	SLD2126-E
Description	21.5" TFT LCD, 1200/1600 nits LED backlight, MaxRGB(NTSC 94%/ 85%), 1920x1080			
Screen size	21.5"			
Display area (mm)	476.6(H) x 268.1(V)			
Brightness	1200/ 1600 cd/m ²			
Resolution	1920x1080			
Aspect ratio	16:9			
Contrast ratio	4500:1/ 3700:1			
Pixel pitch (mm)	0.24825 (H) x 0.24825 (V)			
Pixel per inch (PPI)	102			
Viewing angle	178° (H), 178° (V)			
Color saturation (NTSC)	94%/ 85%			
Display colors	16.7M			
Response time (Typical)	25ms			
Video interface	LVDS	DVI-I, DP/ VGA, DVI-D		
Input power		DC 12V		
Power consumption	49w	55w		
Dimensions (mm)	497.6x292.2x13.35	497.6x292.2x13.35	500.6x 295.2x 51.1	540x370x61
Bezel size (U/B/L/R)	10.35/10.35/8.9/8.9	10.35/10.35/8.9/8.9	11.8/11.8/10.4/10.4	34.1/66.1/33.5/33.5
Weight (Net)	1.7kg	1.8kg	4.3kg/ 5.5kg	6.12kg
Mounting			VESA 75x75,100x100	VESA 75x75,100x100
OSD key		4 keys (Power switch, menu, +, -)		
OSD control		Brightness, color, contrast, H/V position... etc		
Operating temperature	0°C ~ +50°C			
Storage temperature	-20°C ~ +60°C			
Product approval			CE, FCC	CE, FCC

Ordering Information

DLF2126-ANW-A01	21.5", 1200nits, FHD, MaxRGB, LID21A, 5 in 1, V1
DLH2126-ANW-I01	21.5", 1200nits, FHD, MaxRGB, AD6038GDP+LID, DC12V, 5 in 1, V1
DLO2126-ANW-I01	21.5", 1200nits, FHD, MaxRGB, AD6038GDP+LID, O/B-4key, DC12V, 5 in 1, V1
DLF2126-ENN-A11	21.5", 1600nits, FHD, LID21A.5 in 1, V2
DLH2126-ENN-G11	21.5", 1600nits, FHD, LID21A, AD2662GD, DC12V, 5 in 1, V2
SLO2126-ENB-G11	21.5", 1600nits, FHD, LID21A, AD2662GD, 5key, O/B, DC12V, V2
SLD2126-ENB-G11	21.5", 1600nits, FHD, LID21A, AD2662GD, 5key, O/B, DC12V, V2