


# 2325-E

23" TFT LCD, 1000 nits LED backlight, 1920x1080

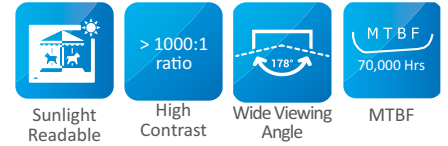

## Key Features

- 23" sunlight readable, high brightness (1,000 nits)
- Resolutions: 1920 x 1080
- Aspect ratio of 16:9
- Wide viewing angle of 178° (H), 178° (V)
- High contrast ratio (1000:1)
- Low power consumption
- BL MTBF: 70,000 hours

## Specifications

	DLF2325-E	DLH2325-E	SLO2325-E	SLD2325-E
Description	23" TFT LCD, 1000 nits LED backlight, 1920x1080			
Screen size	23"			
Display area (mm)	509.1(H) x 286.4(V)			
Brightness	1000 cd/m <sup>2</sup>			
Resolution	1920x1080			
Aspect ratio	16:9			
Contrast ratio	1000:1			
Pixel pitch (mm)	0.2652 (H) x 0.2652 (V)			
Pixel per inch (PPI)	96			
Viewing angle	178° (H), 178° (V)			
Color saturation (NTSC)	84%			
Display colors	16.7M			
Response time (Typical)	14ms			
Video interface	LVDS	VGA, DVI-D		
Input power		DC 12V		
Power consumption	39w	42w		
Dimensions (mm)	533.2x312x11.9	533.2x312x11.9	570.41x314.27x35.93	535.6x314.2x35.4
Bezel size (U/B/L/R)	10.5/10.5/9.7/9.7	10.5/10.5/9.7/9.7	11.6/11.6/28.3/28.3	11.6/11.6/10.9/10.9
Weight (Net)	2kg	2kg	4.2kg	4kg
Mounting			VESA 75x75,100x100	VESA 75x75,100x100
OSD key		4 keys (Power switch, menu, +, -)		
OSD control		Brightness, color, contrast, H/V position... etc		
Operating temperature	0°C ~ +50°C			
Storage temperature	-20°C ~ +60°C			
Product approval			CE, FCC	CE, FCC

## Ordering Information

DLF2325-ENN-A01	23",1000nits,FHD,LID23A.5 in 1,V01
DLH2325-ENN-I01	23",1000nits,FHD,LID23A.AD6038GD,DC 12V,5 in 1,V01
SLO2325-ENB-I01	23",1000nits,FHD,LID23A.AD6038GD,O/B,DC12V,V01
SLD2325-ENB-I01	23",1000nits,FHD,LID23A.AD6038GD,O/B,DC12V,V01