


# 2706-A

27" TFT LCD, 1200 nits LED backlight, 1920x1080

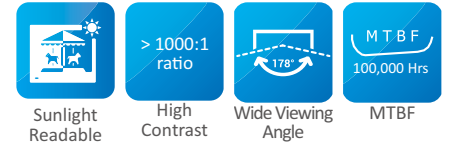

## Key Features

- 27" sunlight readable, high brightness (1200 nits)
- Resolutions: 1920 x 1080
- Aspect ratio of 16:9
- Wide viewing angle of 178° (H), 178° (V)
- High color contrast ratio (3000:1)
- Low power consumption
- BL MTBF: 100,000 hours

## Specifications

	DLF2706-A	DLH2706-A	DLD2706-A
Description	27" TFT LCD, 1200 nits LED backlight, 1920x1080		
Screen size	27"		
Display area (mm)	597.6(H) x 336.1(V)		
Brightness	1200 cd/m <sup>2</sup>		
Resolution	1920x1080		
Aspect ratio	16:9		
Contrast ratio	3000:1		
Pixel pitch (mm)	0.311 (H) x 0.311 (V)		
Pixel per inch (PPI)	81		
Viewing angle	178° (H), 178° (V)		
Color saturation (NTSC)	81%		
Display colors	16.7M		
Response time (Typical)	12ms		
Video interface	LVDS	VGA, DVI-D, DP	
Input power		DC 12V	
Power consumption	57w	62w	
Dimensions (mm)	622x360.5x13.7	622x360.5x13.7	625x363.5x45.1
Bezel size (U/B/L/R)	10/10/10/10	10/10/10/10	11.5/11.5/11.5/11.5
Weight (Net)	2.8kg	2.8kg	6.2kg
Mounting			VESA 200x100,100x100
OSD key		4 keys (Power switch, menu, +, -)	
OSD control		Brightness, color, contrast, H/V position... etc	
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

## Ordering Information

DLF2706-ANN-A01	27",1200nits,FHD,LID27A,5in1,V1
DLH2706-ANN-I01	27",1200nits,FHD,LID27A,AD6038GDP,DC12V,5in1,V1
DLD2706-ANB-I01	27",1200nits,FHD,LID27A,AD6038GDP,O/B,DC12V,3in1,V1