


3255-E

32" TFT LCD, 1000 nits LED backlight, 1920x1080

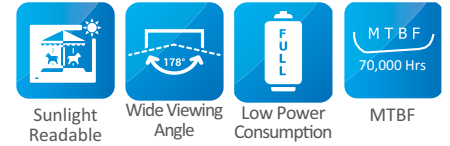

Key Features

- 32" sunlight readable, high brightness (1,000 nits)
- Resolutions: 1920 x 1080
- Aspect ratio of 16:9
- Wide viewing angle of 178° (H), 178° (V)
- High contrast ratio (5800:1)
- Low power consumption
- BL MTBF: 70,000 hours

Specifications

	DLF3255-E	DLH3255-E	SLO3255-E	SLD3255-E
Description	32" TFT LCD, 1000 nits LED backlight, 1920x1080			
Screen size	32"			
Display area (mm)	698.4(H) x 392.8(V)			
Brightness	1000 cd/m ²			
Resolution	1920x1080			
Aspect ratio	16:9			
Contrast ratio	5800:1			
Pixel pitch (mm)	0.3637 (H) x 0.3637 (V)			
Pixel per inch (PPI)	70			
Viewing angle	178° (H), 178° (V)			
Color saturation (NTSC)	80%			
Display colors	16.7M			
Response time (Typical)	8ms			
Video interface	LVDS	VGA, DVI-D, HDMI		
Input power	AC 100~240V			
Power consumption	68w	71w		
Dimensions (mm)	732.4x426.85x21.4	732.4x426.85x21.4	782.4x426.85x60.4	735.4x429.85x60.4
Bezel size (U/B/L/R)	14/14/14/14	14/14/14/14	14/14/39/39	15.5/15.5/15.5/15.5
Weight (Net)	5.5kg	6.2kg	12kg	11.5kg
Mounting			VESA 400x100	VESA 400x100
OSD key	4 keys (Power switch, menu, +, -)			
OSD control	Brightness, color, contrast, H/V position... etc			
Operating temperature	0°C ~ +50°C			
Storage temperature	-20°C ~ +60°C			
Product approval			CE, FCC	CE, FCC

Ordering Information

DLF3255-ENN-A31	32",1000nits,FHD,LID32B,2 in 1.V04
DLH3255-ENN-G31	32",1000nits,FHD,LID32B.AD2662GDHM,AC100~240V.2 in 1,V04
SLO3255-ENB-G31	32",1000nits,FHD,LID32B.AD2662GDHM,O/B,AC100~240V.V04
SLD3255-ENB-G31	32",1000nits,FHD,LID32B.AD2662GDHM,O/B,AC100~240V.V04