


4215-ANK



42.1" Resizing LCD, 800 nits LED backlight, MaxRGB, 1900x2160

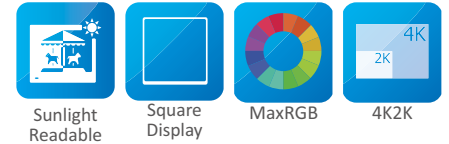

Key Features

- 42.1" resizing LCD
- Square display (aspect ratio of 8 : 9)
- Sunlight readable, high brightness (800 nits)
- Resolutions: 1900 x 2160
- MaxRGB (NTSC 94%)
- Wide view angle of 178° (H), 178° (V)
- BL MTBF: 100,000 hours

Specifications

	SSF4215-ANK	SSH4215-ANK	SSD4215-ANK
Description	42.1" Resizing LCD, 800 nits LED backlight, MaxRGB, 1900x2160		
Screen size	42.1"		
Display area (mm)	706.8(H) x 803.5 (V)		
Brightness	800 cd/m ²		
Resolution	1900x2160		
Aspect ratio	8:9		
Contrast ratio	2000:1		
Pixel pitch (mm)	0.372 (H) x 0.372 (V)		
Pixel per inch (PPI)	68		
Viewing angle	178° (H), 178° (V)		
Color saturation (NTSC)	94%		
Display colors	1.07G		
Response time (Typical)	8ms		
Video interface	V-by-One	VGA, DVI-D, HDMI, DP	
Input power		AC 100~240V	
Power consumption	136W	141W	
Dimensions (mm)	741.3x838x22.4	741.3x838x22.4	743.9x840.6x70.8
Bezel size (U/B/L/R)	15/15/15/15	15/15/15/15	16.3/16.3/16.3/16.3
Weight (Net)	12.4kg	13kg	22kg
Mounting			VESA 400x200, 400x300
OSD key		5 keys (Power switch, menu, +, -, Exit)	
OSD control		Brightness, color, contrast, H/V position... etc	
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF4215-ANK-A01	42.1"(left),800nits.1900*2160,MaxRGB,LID42A,2in1,V1
SSF4215-ANK-A02	42.1"(right),800nits.1900*2160,MaxRGB,LID42A,2in1,V1
SSH4215-ANK-M01	42.1"(left),800nits.1900*2160,MaxRGB,LID42,AD9131GDHP,AC100~240V,2in1,V1
SSH4215-ANK-M02	42.1"(right),800nits.1900*2160,MaxRGB,LID42,AD9131GDHP,AC100~240V,2in1,V1
SSD4215-ANK-M01	42.1"(left),800nits.1900*2160,MaxRGB,LID42A,AD9131GDHP,O/B,Speaker*2,AC100~240V,V1
SSD4215-ANK-M02	42.1"(right),800nits.1900*2160,MaxRGB,LID42A,AD9131GDHP,O/B,Speaker*2,AC100~240V,V1