


4485-INK



44.8" Resizing LCD, 1000 nits LED backlight, MaxRGB, 3840x1076

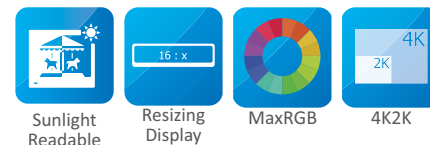

Key Features

- 44.8" resizing LCD
- Resizing display (aspect ratio of 16 : 4.5)
- Sunlight readable, high brightness (1,000 nits)
- Resolutions: 3840 x 1076
- MaxRGB (NTSC 94%)
- Wide view angle of 178° (H), 178° (V)
- BL MTBF: 100,000 hours

Specifications

	SSF4485-INK	SSH4485-INK	SSD4485-INK
Description	44.8" Resizing LCD, 1000 nits LED backlight, MaxRGB, 3840x1076		
Screen size	44.8"		
Display area (mm)	1095.84(H) x 307.1 (V)		
Brightness	1000 cd/m ²		
Resolution	3840x1076		
Aspect ratio	16:4.5		
Contrast ratio	TBD		
Pixel pitch (mm)	0.2854 (H) x 0.2854 (V)		
Pixel per inch (PPI)	89		
Viewing angle	178° (H), 178° (V)		
Color saturation (NTSC)	94%		
Display colors	1.07G		
Response time (Typical)	9.5ms		
Video interface	V-by-One	VGA, DVI-D, HDMI, DP	
Input power	AC 100~240V		
Power consumption	TBD		
Dimensions (mm)	1121.7x338.9x21.6	1121.7x338.9x21.6	1124.3x341.5x64.6
Bezel size (U/B/L/R)	13.3/13.3/10.9/10.9	13.3/13.3/10.9/10.9	14.6/14.6/12.2/12.2
Weight (Net)	9.4kg	9.4kg	16.2kg
Mounting			VESA 300x75
OSD key	5 keys (Power switch, menu, +, -, Exit)		
OSD control	Brightness, color, contrast, H/V position... etc		
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF4485-INK-A01	44.8",1000nits,3840x1076,MaxRGB,LID44A,3in1,V1
SSH4485-INK-M01	44.8",1000nits,3840x1076,MaxRGB,LID44A,AD9131DHPA,AC100~240V,3in1,V1
SSD4485-INK-M01	44.8",1000nits,3840x1076,MaxRGB,LID44A,AD9131DHPA,O/B,Speaker*2,AC100~240V,2in1,V1