


# 5505-LNK

55" TFT LCD, 1000 nits LED backlight, MaxRGB, 3840x2160

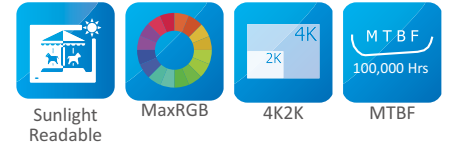

## Key Features

- 55" sunlight readable, high brightness (1,000 nits)
- Resolutions: 3840 x 2160
- MaxRGB (NTSC 94%)
- Wide viewing angle of 178° (H), 178° (V)
- High color contrast ratio (1000:1)
- Low power consumption
- BL MTBF: 100,000 hours

## Specifications

	DLF5505-LNK	DLH5505-LNK	DLD5505-LNK
Description	55" TFT LCD, 1000 nits LED backlight, MaxRGB, 3840x2160		
Screen size	55"		
Display area (mm)	1209.6(H) x 680.4(V)		
Brightness	1000 cd/m <sup>2</sup>		
Resolution	3840x2160		
Aspect ratio	16:9		
Contrast ratio	1000:1		
Pixel pitch (mm)	0.315 (H) x 0.315 (V)		
Pixel per inch (PPI)	80		
Viewing angle	178° (H), 178° (V)		
Color saturation (NTSC)	94%		
Display colors	1.07G		
Response time (Typical)	6ms		
Video interface	V-by-One	DVI-D, HDMI, DP	
Input power		AC 100~240V	
Power consumption	160w	196w	
Dimensions (mm)	1240x711x22.5	1240x711x22.5	1242.6 x 713.6 x 74.3
Bezel size (U/B/L/R)	14/14/14/14	14/14/14/14	15.3/15.3/15.3/15.3
Weight (Net)	23.5kg	24kg	36kg
Mounting			VESA 400x200, 400x300
OSD key		5 keys (Power switch, menu, +, -, Exit)	
OSD control		Brightness, color, contrast, H/V position... etc	
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

## Ordering Information

DLF5505-LNK-A01	55",1000nits,UHD,MaxRGB,LID55A,2in1,V1
DLH5505-LNK-M01	55",1000nits,UHD,MaxRGB,LID55A,AD9131DHP,AC100~240V,2in1,V1
DLD5505-LNK-M01	55",1000nits,UHD,MaxRGB,LID55A,AD9131DHP,O/B,Speakerx2,AC100~240V,V1