


6500-A

65" TFT LCD, 2000 nits LED backlight, 3840x2160

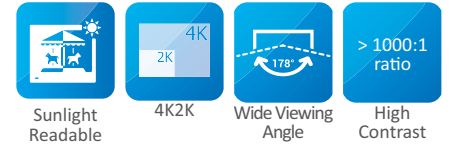

Key Features

- 65" sunlight readable, high brightness (2,000 nits)
- Resolutions: 3840 x 2160
- Wide viewing angle of 178° (H), 178° (V)
- High contrast ratio (3800:1)
- Low power consumption
- BL MTBF: 100,000 hours

Specifications

	DLF6500-A	DLH6500-A	DLD6500-A
Description	65" TFT LCD, 2000 nits LED backlight, 3840x2160		
Screen size	65"		
Display area (mm)	1428.4(H) x 803.5(V)		
Brightness	2000 cd/m ²		
Resolution	3840x2160		
Aspect ratio	16:9		
Contrast ratio	3800:1		
Pixel pitch (mm)	0.372 (H) x 0.372 (V)		
Pixel per inch (PPI)	67		
Viewing angle	178° (H), 178° (V)		
Color saturation (NTSC)	79%		
Display colors	1.07G		
Response time (Typical)	8ms		
Video interface	V-by-One	VGA, DVI-D, HDMI, DP	
Input power	AC 100~240V		
Power consumption	351w	356w	
Dimensions (mm)	1471x846x54.5	1471x846x54.5	1474.2x849.2x95
Bezel size (U/B/L/R)	19.3/19.3/19.3/19.3	19.3/19.3/19.3/19.3	20.88/20.88/20.9/20.9
Weight (Net)	29.5kg	30kg	46kg
Mounting			VESA 400x200, 400x400
OSD key	5 keys (Power switch, menu, +, -)		
OSD control	Brightness, color, contrast, H/V position... etc		
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Ordering Information

DLF6500-ANU-A01	65",2000nits,UHD,LID65A,2in1,V1
DLH6500-ANU-M01	65",2000nits,UHD,LID65A,AD9131GDHP,AC100~240V,2in1,V1
DLD6500-ANU-M01	65",2000nits,UHD,LID65A,AD9131GDHP,speaker*2,O/B,AC100~240V,V1